



1280 N Red Gum Street Anaheim, CA 92806 • 714-632-1400

Mako Industries 3-Pound Ozone Injection System

[Get a QUOTE >>](#)

Standard Features:

- Small Footprint Cabinet Mounting
- 3 Pound / Day Ozone Delivery
- 94% Pure Oxygen Production
- Cooled Air Ozone Production
- 100 PSI Delivery Capability
- Ambient Ozone Monitoring
- 20 Point Delivery System
- Adjustable Well Timers
- Adjustable Ozone Production
- External Pressure Gauge
- External Flow Regulator
- 8 CFM Breakthrough Compressor
- Total Air Flow Filtration System
- Total Water Removal System
- Digital Operator Interface

Standard Options:



Air Conditioner Cooling System
Oxidation Points
Remote Telemetry
Totally Enclosed Trailer Mounting

Standard Performance Specifications:

Skid Dimensions = 4' Width x 2' Depth x 6' Height
Heavy Duty Construction Throughout
Electrical Requirement = 120 Volt/1 Phase/40 Amp
Process Flow = 8 CFM and up to 100 PSI
Ozone Production = Up To 3 Pounds / Day



- LEGEND**
- AC AIR COOLER
 - AOA AMBIENT OZONE ALARM
 - BC BOOST COMPRESSOR – 60 PSI
 - BTC BREAK THROUGH COMPRESSOR (8CFM)
 - CP CONTROL PANEL – NEMA 12
 - COM AIR COMPRESSOR .33 HP
 - CV CHECK VALVE
 - DD DESICCANT DRYER
 - FLT FILTER WATER REMOVAL
 - FM FLOW MONITORING
 - FR FLOW REGULATOR
 - IFT INLET AIR FILTER
 - OXY OXYGEN CONCENTRATOR – 10.3 LITER
 - OZG OZONE GENERATOR – 3 LB
 - PG PRESSURE GAUGE
 - PLC PLC CONTROL – INTERFACE
 - PS PRESSURE SWITCH
 - SV SOLENOID VALVE

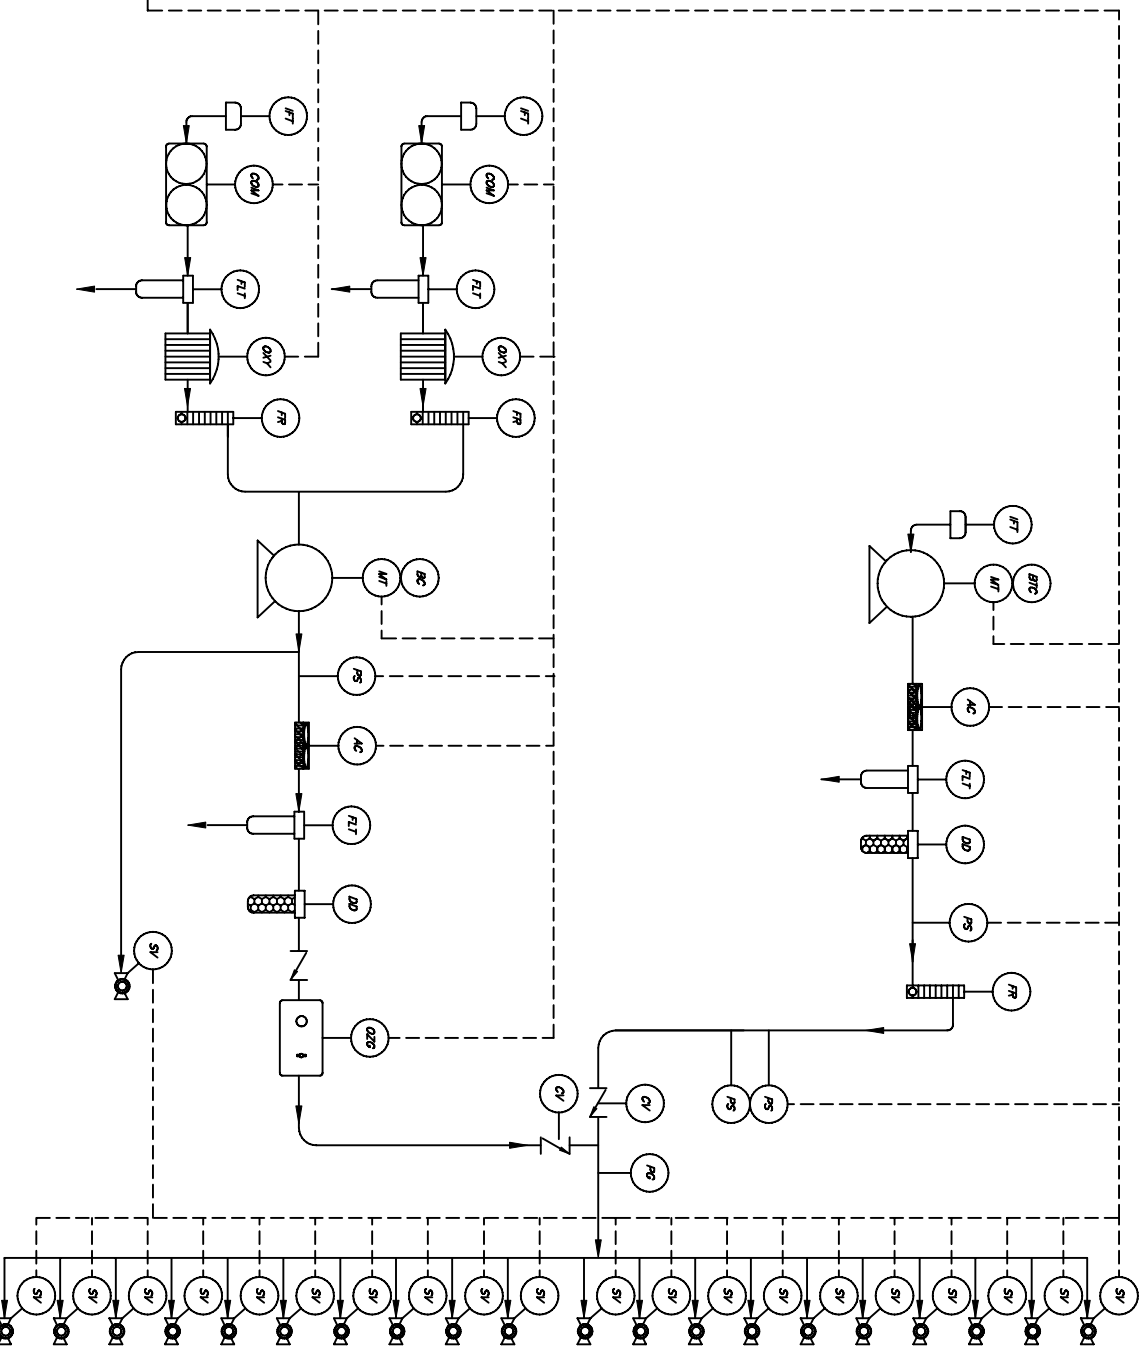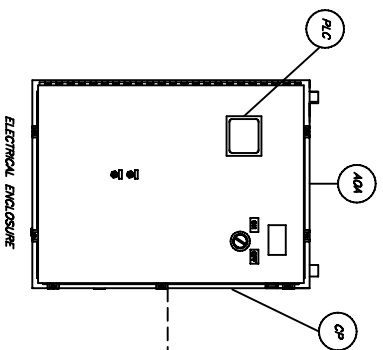

MAKO INDUSTRIES

3 POUND / DAY – 20 POINT OZONE INJECTION

PROCESS INSTRUMENTATION DIAGRAM

DATE: 9/1/08 FILE: OZONE INJECTION.PID

OZONE INJECTION SYSTEM